



تووسکا Tooska

DRIVE SUMMERLY





ضد یخ یک لیتری توسکا

شناسه محصول: ۲۴۵۷۱۵۸۰۳

مشخصات کلی ضد یخ های توسکا:

- ضد یخ های توسکا خاصیت ضد خوردگی
- مقاومت در برابر سرمای تا دمای زیر منفی ۴۰ درجه
- خاصیت ضد جوش، ضد یخ های توسکا تا درجه دمای ۱۲۰ درجه
- دارای استاندارد GS1 اتحادیه اروپا
- رقابت با بهترین نمونه ها و رقابتی بین المللی
- استفاده از بهترین مواد اولیه در تولید ضد یخ های توسکا

tooska-gh.com
[tooska_antifreezes](#)



ضد یخ دو لیتری توسکا

شناسه محصول: ۲۳۴۵۶۵۴۳

مشخصات کلی ضد یخ های توسکا:

- ضد یخ های توسکا خاصیت ضد خوردگی
- مقاومت در برابر سرمای تا دمای زیر منفی ۴۰ درجه
- خاصیت ضد جوش، ضد یخ های توسکا تا درجه دمای ۱۲۰ درجه
- دارای استاندارد GS1 اتحادیه اروپا
- رقابت با بهترین نمونه ها و رقبای بین المللی
- استفاده از بهترین مواد اولیه در تولید ضد یخ های توسکا

tooska-gh.com
[tooska_antifreezes](https://www.instagram.com/tooska_antifreezes)



ضد یخ چهار لیتری توسکا

شناسه محصول: ۲۳۳۴۵۶۸۷۳

مشخصات کلی ضد یخ های توسکا:

- ضد یخ های توسکا خاصیت ضد خوردگی
- مقاومت در برابر سرمای تا دمای زیر منفی ۴۰ درجه
- خاصیت ضد جوش، ضد یخ های توسکا تا درجه دمای ۱۲۰ درجه
- دارای استاندارد GS1 اتحادیه اروپا
- رقابت با بهترین نمونه ها و رقبای بین المللی
- استفاده از بهترین مواد اولیه در تولید ضد یخ های توسکا

 tooska-gh.com
 [tooska_antifreezes](https://www.instagram.com/tooska_antifreezes)



ISO 9001
ISO 14001
ISO 9001

DRIVE

SUMMERLY



شماره تلفن: ۳-۲۱۸۸۴۸۶۴۲۱

مدیر فروش: ۹۱۲۱۲۵۸۸۴۷

فکس: ۲۱۸۶۰۱۵۵۴۸

آدرس کارخانه: شهرک صنعتی نظر اباد

آدرس دفتر مرکزی: مرزداران

tooska_antifreezs



تووسکا Tooska



tooska-gh.com



PRODUCT CATALOGUE

A circular image showing an industrial refinery at night, with various towers, pipes, and structures illuminated by warm lights against a dark sky.

LUBRICANTS

MANUFACTURER

OUR VISION

To be the leading provider of high-quality lubricants and related products that enhance the performance and longevity of machinery and equipment while reducing the impact on the environment.

OUR MISSION

Our mission is to provide our customers with superior lubrication solutions that optimise equipment performance, extend equipment life, and minimise environmental impact. We strive to achieve this by utilising advanced technologies, innovative products, and a highly trained and motivated team.

We are committed to conducting our business with integrity, transparency, and social responsibility, and to continuously improving our processes and products to meet the evolving needs of our customers and the industry.

OUR VALUES

Leading manufacturer and supplier of lubricants, gear oil fluids, grease, and coolant worldwide. Superior-quality oil is important, and fundamental characteristics of your vehicle depend on it like smooth running, fuel efficiency, performance, and emissions.

Multi-grade synthetic engine oils for modern petrol engines have optimal viscosity at wide ranging temperatures.

Teams depend on the personalities of the members as well as the leadership style of the managers. However, the ingredients for what makes a successful team are similar across the board.

Having mutual respect, common and aligned goals, open communication, and patience can all help make for a successful team.



LUBRICANTS

ULTIMATE PROTECTION

ABOUT US

Welcome to Proxil Lubricants, where excellence meets innovation in the heart of Dubai, UAE. With over two decades of experience in the industry, we take pride in being a leading engine oil manufacturer, catering to the diverse lubrication needs of our customers.

Since our inception 22 years ago, we have been committed to delivering premium-quality lubricants that ensure optimal performance and longevity for engines of all types. Our journey began with a vision to revolutionize the lubricants market in Dubai and beyond, and today, we stand as a testament to our unwavering dedication and expertise.

At Proxil Lubricants, we understand the importance of reliability and efficiency when it comes to engine oils. That's why our team of experts works tirelessly to research, develop, and produce cutting-edge lubrication solutions that exceed industry standards. Whether it's for automotive, industrial, or commercial applications, our products are meticulously formulated to deliver unparalleled performance and protection, even in the most demanding conditions.

What sets us apart is not just our products but also our unwavering commitment to customer satisfaction. We believe in building long-lasting relationships with our clients based on trust, transparency, and integrity. That's why we strive to provide personalized service, expert advice, and prompt support to meet the unique needs of each customer.

As we embark on the next phase of our journey, we remain firmly rooted in our core values of excellence, innovation, and customer-centricity. With a relentless drive for continuous improvement and a passion for pushing the boundaries of lubrication technology, we are poised to lead the way in shaping the future of the industry.

Thank you for choosing Proxil Lubricants. Together, let's drive towards a smoother, more efficient tomorrow.

License No: 3947

SCHEDULE A - LICENSE AGREEMENT


The marks referred to and licensed under the Agreement between API and
LUK INTERNATIONAL TRADING
may be used through 31-Mar-2025 are as follows:

API SERVICE SYMBOL

Licensee is authorized to display the API Certification Mark on the following products:



BRAND NAME	SAE VISCOSITY GRADE	API SERVICE CATEGORY	CLASSIFICATION
PROXIL URANUS	15W-40	CI-4/SL	
PROXIL VENUS	0W-16	SP	Resource Conserving, SN PLUS
PROXIL VENUS	0W-20	SP	Resource Conserving, SN PLUS
PROXIL VENUS	0W-20	SN	
PROXIL VENUS	0W-30	SP	Resource Conserving, SN PLUS
PROXIL VENUS	5W-20	SP	Resource Conserving, SN PLUS
PROXIL VENUS	5W-20	SN	
PROXIL VENUS	5W-30	SP	Resource Conserving, SN PLUS
PROXIL VENUS	5W-30	SN	
PROXIL VENUS	5W-40	SN	
PROXIL VENUS	10W-30	SP	Resource Conserving, SN PLUS
PROXIL VENUS	10W-30	SN	
PROXIL VENUS	10W-30	SL	
PROXIL VENUS	10W-40	SN	
PROXIL VENUS	10W-40	SL	
PROXIL VENUS	15W-40	SN	
PROXIL VENUS	15W-40	SL	
PROXIL VENUS	20W-40	SN	
PROXIL VENUS	20W-50	SN	
PROXIL VENUS	20W-50	SL	
PROXIL VENUS	40	SL	



Manager - EOLCS/DEF/MOM

Date: 28-May-2024

Engine Oil Licensing and Certification System

Copyright 2021, American Petroleum Institute, all rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Diamond"), and the API Certification Mark ("Starburst") are either trademarks or registered trademarks of API, 2000-1401 02/20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

License No: 3947

SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and
LUK INTERNATIONAL TRADING
may be used through 31-Mar-2025 are as follows:

API CERTIFICATION MARK

Licensee is authorized to display the API Certification Mark on the following products:



BRAND NAME	SAE VISCOSITY GRADE	ILSAC SPECIFICATION
PROXIL VENUS	0W-20	GF-6A
PROXIL VENUS	0W-30	GF-6A
PROXIL VENUS	5W-20	GF-6A
PROXIL VENUS	5W-30	GF-6A
PROXIL VENUS	10W-30	GF-6A

Manager - EOLCS/DEF/MOM

Date: 28-May-2024

Engine Oil Licensing and Certification System

Copyright 2021, American Petroleum Institute. All rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Donut"), and the API Certification Mark ("Starburst") are either trademarks or registered trademarks of API. 2020-342 | 02.20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

License No: 3947

SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and
LUK INTERNATIONAL TRADING
may be used through 31-Mar-2025 are as follows:



API CERTIFICATION MARK

Licensee is authorized to display the API Certification Mark on the following products:

BRAND NAME	SAE VISCOSITY GRADE	ILSAC SPECIFICATION
PROXIL VENUS	0W-16	GF-6B

Manager - EOLCS/DEF/MOM

Date: 28-May-2024

Engine Oil Licensing and Certification System

Copyright 2021, American Petroleum Institute. All rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Donut"), and the API Certification Mark ("Starburst") are either trademarks or registered trademarks of API. 2020-2421-02-20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

Certificate of Registration

*This is to Certify that
Quality Management Systems of*



**FIVE STAR LUBRICANTS & OIL IND L.L.C
SOLE PROPRIETORSHIP**

**Al Sajaa Industrial Area, Behind Tahseel, Sharjah
United Arab Emirates**

has been assessed and found to conform to the requirements of

ISO 9001:2015

for the following scope:

Manufacturer of Oil and Lubricants

Certificate No.	: 179AGF104101	
Initial Registration Date	: 21.05.2024	Issuance Date : 21.05.2024
Date of Expiry *	: 20.05.2027	
1st Surve. Due	: 20.05.2025	2nd Surve. Due : 20.05.2026

Director

Accurate Global Ltd.

Address- 27, Old Gloucester Street, London, WC1N3AX, United Kingdom

*Validity of the Certificate is subject to successful completion of surveillance audit on or before of due date. (in case surveillance audit is not allowed to be conducted, this certificate shall be suspended/withdrawal).

Certificate Verification: Please Re-check the validity of certificate at www.accurateiso.com at Active Clients. Certificate is the property of Accurate Global Ltd. London, UK and shall be returned immediately when demanded.



PROXIL[®]



LUBRICANTS GASOLINE ENGINE OIL



GASOLINE ENGINE OIL ULTIMATE PROTECTION



PROXIL VENUS 0W-16 API SP

Fully synthetic motor oil for gasoline engine

DESCRIPTION

0W-16 API SP Fully Synthetic Motor Oil is a premium-grade lubricant engineered specifically for gasoline engines. Formulated with advanced synthetic base oils and state-of-the-art additives, it offers unparalleled protection against friction, wear, and deposit buildup.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.84
Viscosity @100°C, cSt	ASTM D 445	7.4
Viscosity @40°C, cSt	ASTM D 445	38.25
Viscosity Index	ASTM D 2270	165
Pour Point, °C	ASTM D 97	-42
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.2
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API SP, SN PLUS, SN, SM, SL, SJ, API SP RESOURCE CONSERVING, SN PLUS RESOURCE CONSERVING, SN RESOURCE CONSERVING, ILSAC GF-6B, HONDA, TOYOTA, MITSUBISHI, GENERAL MOTORS DEXOS1 GEN2

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL VENUS 0W-20 API SP

Fully synthetic motor oil for gasoline engine

DESCRIPTION

0W-20 API SP Fully Synthetic Motor Oil is a high-quality lubricant specially designed for gasoline engines. Crafted with premium synthetic base oils and advanced additives, it offers superior protection against friction, wear, and carbon deposits.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.842
Viscosity @100°C, cSt	ASTM D 445	8.36
Viscosity @40°C, cSt	ASTM D 445	44.8
Viscosity Index	ASTM D 2270	173
Pour Point, °C	ASTM D 97	-42
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.2
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

APLSP, SN PLUS, SN,SM,SL,SJ, API SN PLUS RESOURCE CONSERVING, SN RESOURCE CONSERVING, ILSAC GF-6A, GF-5HONDA, TOYOTA, MITSUBISHI, NISSAN, LEXUS, ISUZUKI-GENERAL MOTORS DEXOS 1 GEN3FORD WSS-M2C947

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL VENUS 0W-30 API SP

Fully synthetic motor oil for gasoline engine

DESCRIPTION

0W-30 API SP Fully Synthetic Motor Oil is a premium-grade lubricant engineered specifically for gasoline engines. Formulated with advanced synthetic base oils and cutting-edge additives, it provides exceptional protection against friction, wear, and engine deposits

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.845
Viscosity @100°C, cSt	ASTM D 445	10.45
Viscosity @40°C, cSt	ASTM D 445	58
Viscosity Index	ASTM D 2270	171
Pour Point, °C	ASTM D 97	-42
Flash point °C	ASTM D 92	225
TBN, mgKOH/gm	ASTM D 2896	7.2
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API SP, SN PLUS, SN, SM, SL, SJ, API SP RESOURCE CONSERVING, SN PLUS RESOURCE CONSERVING, SN RESOURCE CONSERVING, ILSAC GF-6A, HONDA, TOYOTA, MITSUBISHI, GENERAL MOTORS DEXOS1 GEN2

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL VENUS 0W-40 API SP

Fully synthetic motor oil for gasoline engine

DESCRIPTION

0W-40 API SP Fully Synthetic Motor Oil is a high-performance lubricant crafted for gasoline engines. Engineered with premium synthetic base oils and advanced additives, it offers unparalleled protection against friction, wear, and deposit formation.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.845
Viscosity @100°C, cSt	ASTM D 445	14.3
Viscosity @40°C, cSt	ASTM D 445	80.9
Viscosity Index	ASTM D 2270	185
Pour Point, °C	ASTM D 97	-48
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	10
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API SP, SN PLUS, SN, SM, SL, SJ, API SP RESOURCE CONSERVING, SN PLUS RESOURCE CONSERVING, SN RESOURCE CONSERVING, ILSAC GF-6A, HONDA, TOYOTA, MITSUBISHI, GENERAL MOTORS DEXOS1 GEN2

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX





GASOLINE ENGINE OIL ULTIMATE PROTECTION



PROXIL VENUS 5W-20 API SN/CF

Fully synthetic engine oil for gasoline engine

DESCRIPTION

5W-20 API SN/CF Fully Synthetic Engine Oil for gasoline engines is a premium-grade lubricant specifically formulated to meet the demands of modern petrol engines. This oil combines advanced synthetic base oils with top-tier additives, ensuring superior protection against friction, wear, and deposit buildup.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.855
Viscosity @100°C, cSt	ASTM D 445	7.95
Viscosity @40°C, cSt	ASTM D 445	42.75
Viscosity Index	ASTM D 2270	161
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-30°C,mPa.s	ASTM D 5293	4500

MEETS OR EXCEEDS:

API SN, SM, SL, SJ, ILSAC GF-5, FORD WSS-M2C947-A, GM DEXOS 1.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL VENUS 5W-30 API SN/CF

Fully synthetic engine oil for gasoline engine

DESCRIPTION

5W-30 API SN/CF Fully Synthetic Engine Oil is a high-quality lubricant specifically designed for gasoline engines. Formulated with advanced synthetic base oils and premium additives, it offers outstanding protection against friction, wear, and deposit formation.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.855
Viscosity @100°C, cSt	ASTM D 445	10.8
Viscosity @40°C, cSt	ASTM D 445	63
Viscosity Index	ASTM D 2270	164
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-30°C,mPa.s	ASTM D 5293	4700

MEETS OR EXCEEDS:

API SN, CF, ACEA C3/C2-16, BMW LL-04, VW 502/505, MB 229.31, PORSCHE C30.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL VENUS 5W-40 API SN/CF

Fully synthetic engine oil for gasoline engine

DESCRIPTION

5W-40 API SN/CF Fully Synthetic Engine Oil is a top-tier lubricant engineered specifically for gasoline engines. Crafted with premium synthetic base oils and advanced additives, it offers exceptional protection against friction, wear, and deposit buildup.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.855
Viscosity @100°C, cSt	ASTM D 445	14.8
Viscosity @40°C, cSt	ASTM D 445	92
Viscosity Index	ASTM D 2270	169
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	4950

MEETS OR EXCEEDS:

API SN, SM, SL, SJ, CF, ACEA A3/B3, A3/B4, BMW LL-01, RENAULT RN 0700/0710, VW 502 00/ 505 00, MB 229.3/229.1, PORSCHE A40.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL VENUS 10W-30 API SN/CF

Synthetic Engine oil for gasoline engine

DESCRIPTION

10W-30 API SN/CF Synthetic Engine Oil is a high-quality lubricant specifically formulated for gasoline engines. Engineered with advanced synthetic base oils and premium additives, it offers superior protection against friction, wear, and deposit formation.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.86
Viscosity @100°C, cSt	ASTM D 445	10.4
Viscosity @40°C, cSt	ASTM D 445	62.6
Viscosity Index	ASTM D 2270	156
Pour Point, °C	ASTM D 97	-36
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5600

MEETS OR EXCEEDS:

API SN, SM, SL, SJ, CF, ACEA A3/B3, A3/B4, RENAULT RN 0700/0710, VW 502 00/ 505 00, MB 229.3.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX





GASOLINE ENGINE OIL ULTIMATE PROTECTION



PROXIL VENUS 10W-40 API SN/CF

Synthetic Engine oil for gasoline engine

DESCRIPTION

10W-40 API SN/CF Synthetic Engine Oil is a premium lubricant specially designed for gasoline engines. Crafted with advanced synthetic base oils and fortified with top-quality additives, it provides exceptional protection against friction, wear, and deposit formation.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity @40°C, cSt	ASTM D 445	102
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5800

MEETS OR EXCEEDS:

API SN, SM, SL, SJ, CF, ACEA A3/B3, A3/B4, RENAULT RN 0700/0710, VW 502 00/ 505 00, MB 229.3, PSA B71 2300.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL VENUS 10W-30 API SL/CF

Synthetic Engine oil for gasoline engine

DESCRIPTION

10W-30 API SL/CF Synthetic Engine Oil is a high-quality lubricant tailored for gasoline engines. Crafted with advanced synthetic base oils and premium additives, it delivers exceptional protection against friction, wear, and deposit buildup.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	11.8
Viscosity @40°C, cSt	ASTM D 445	78
Viscosity Index	ASTM D 2270	145
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5650

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL VENUS 10W-40 API SL/CF

Synthetic Engine oil for gasoline engine

DESCRIPTION

10W-40 API SL/CF Synthetic Engine Oil is a premium-grade lubricant engineered specifically for gasoline engines. Formulated with advanced synthetic base oils and high-quality additives, it provides superior protection against friction, wear, and deposit buildup.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity @40°C, cSt	ASTM D 445	102
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	215
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5800

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL VENUS 15W-40 API SL/CF

High Performance Technology engine oil for gasoline engine

DESCRIPTION

15W-40 API SL/CF is a type of engine oil suitable for gasoline vehicles. High Performance Technology suggests that it's formulated to meet the demands of modern engines, possibly offering improved performance, protection, and longevity compared to standard oils.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	112
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-15°C,mPa.s	ASTM D 5293	6100

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX





GASOLINE ENGINE OIL ULTIMATE PROTECTION



PROXIL VENUS 20W-50 API SL/CF

High Performance Technology engine oil for gasoline engine

DESCRIPTION

20W-50 API SL/CF High Performance Technology engine oil is specifically designed for gasoline engines. Its viscosity rating ensures optimal flow in both cold and hot conditions, while meeting API SL standards guarantees enhanced protection against wear, oxidation, and deposits.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	20.4
Viscosity @40°C, cSt	ASTM D 445	176
Viscosity Index	ASTM D 2270	136
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	7.4
CCS @-15°C,mPa.s	ASTM D 5293	7500

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL VENUS 20W-60 API SL/CF

High Performance Technology engine oil for gasoline engine

DESCRIPTION

20W-60 API SL/CF High Performance Technology engine oil is tailored for gasoline engines, offering a viscosity profile suitable for varying temperatures. Meeting API SL standards ensures robust protection against wear, oxidation, and deposits, while its high-performance technology enhances engine efficiency and longevity, making it ideal for demanding operating conditions.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.878
Viscosity @100°C, cSt	ASTM D 445	25.4
Viscosity @40°C, cSt	ASTM D 445	
Viscosity Index	ASTM D 2270	140
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	238
TBN, mgKOH/gm	ASTM D 2896	7.5
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL VENUS 25W-60 API SL/CF

High Performance Technology engine oil for gasoline engine

DESCRIPTION

25W-60 API SL/CF High Performance Technology engine oil is engineered for gasoline engines, featuring a viscosity range suitable for diverse temperature conditions. Meeting API SL standards ensures reliable protection against wear, oxidation, and deposits, while its advanced technology enhances engine performance and durability.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.878
Viscosity @100°C, cSt	ASTM D 445	25.8
Viscosity @40°C, cSt	ASTM D 445	
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	238
TBN, mgKOH/gm	ASTM D 2896	7.5
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



GASOLINE ENGINE OIL

GASOLINE ENGINE OILS COME IN VARIOUS VISCOSITY GRADES, WHICH DETERMINE THEIR FLOW CHARACTERISTICS AT DIFFERENT TEMPERATURES. COMMON VISCOSITY GRADES INCLUDE 5W-30, 10W-40, AND 20W-50. THE FIRST NUMBER (E.G., 5W OR 10W) INDICATES THE OIL'S FLOW CHARACTERISTICS IN COLD TEMPERATURES, WITH LOWER NUMBERS FLOWING BETTER IN COLD CONDITIONS. THE SECOND NUMBER (E.G., 30, 40, OR 50) INDICATES THE OIL'S VISCOSITY AT HIGH TEMPERATURES, WITH HIGHER NUMBERS PROVIDING BETTER PROTECTION AT HIGH TEMPERATURES.



PROXIL®



LUBRIFICANTS
DIESEL ENGINE OILS



DIESEL ENGINE OIL ULTIMATE PROTECTION



PROXIL URANUS 5W-40 API CK-4/SN

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

DESCRIPTION

5W-40 API CK-4/SN Synthetic Pro is a top-tier heavy-duty diesel engine oil. Formulated with a blend of synthetic components, it offers enhanced efficiency, durability, and longevity compared to conventional oils.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.84
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity @40°C, cSt	ASTM D 445	94.5
Viscosity Index	ASTM D 2270	170
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	9.9
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API CK-4, CJ-4, CI-4+, CI-4, CH-4, CF, SN, SM, SL, ACEA E11/ E7-22, CAT ECF-3, MB 228.31, MTU TYPE 2.1, VOLVO VDS 4.5, MACK EOS 4.5, MAN 3275/3775, RENAULT VI RLD-4, CUMMINS CES 20086, JASO DH-2, DUETZ DQC III-18 LA.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL URANUS 10W-40 API CK-4/SN

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

DESCRIPTION

10W-40 API CK-4 Synthetic Pro is a cutting-edge heavy-duty diesel engine oil infused with advanced technology for optimal performance. Meeting the strict API CK-4 standards, this synthetic blend ensures superior protection against wear, oxidation, and deposits.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.858
Viscosity @100°C, cSt	ASTM D 445	14.4
Viscosity @40°C, cSt	ASTM D 445	96
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-36
Flash point °C	ASTM D 92	225
TBN, mgKOH/gm	ASTM D 2896	9.8
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API CK-4, CJ-4, CI-4+, CI-4, CH-4, CF, SN, SM, SL, ACEA E11/ E7-22, MB 228.31, MAN 3275/3775, VOLVO VDS 4.5, RENAULT VI RLD-4, MACK EOS-4.5, MTU 2.1, CATERPILLAR ECF-3, DEUTZ DQC III-18 LA, CUMMINS CES 20086, DETROIT DIESEL POWER GUARD 93K222.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL URANUS 15W-40 API CK-4/SN

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

DESCRIPTION

15W-40 API CK-4/SN is a high-quality heavy-duty diesel engine oil formulated to meet the rigorous standards set by the American Petroleum Institute (API). This oil provides exceptional protection against wear, oxidation, and deposits, ensuring long-lasting engine performance.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15.4
Viscosity @40°C, cSt	ASTM D 445	120
Viscosity Index	ASTM D 2270	136
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	228
TBN, mgKOH/gm	ASTM D 2896	9.9
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API CK-4, CJ-4, CI-4+, CI-4, CH-4, CF, SN, SM, SL, ACEA E11/ E7-22, MB 228.31, MAN 3275/3775, VOLVO VDS 4.5, RENAULT VI RLD-4, MACK EOS-4.5, MTU 2.1, CATERPILLAR ECF-3, DEUTZ DQC III-18 LA, CUMMINS CES 20086, DETROIT DIESEL POWER GUARD 93K222, FORD 171-F1.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL URANUS 10W-40 CI-4/SL

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

DESCRIPTION

10W-40 CI-4/SL is a premium-grade engine oil designed for both diesel and gasoline engines. It meets the specifications of API CI-4 for diesel engines and API SL for gasoline engines. This oil offers excellent protection against wear, oxidation, and deposits, ensuring smooth engine operation and extended engine life.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	101
Viscosity Index	ASTM D 2270	156
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	11
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

CI-4, CH-4, CG-4, CF-4, CF, SL, SJ, ACEA E7-16, A3/B4, MB 228.3, MAN 3275, VOLVO VDS-3, DEUTZ DQC-III, DEUTZ DQC II, MTU 2.0, MACK EO-M+, CUMMINS CES 20078/ 77, CATERPILLAR ECF-1A, ECF-2, RENAULT RLD-2.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX





DIESEL ENGINE OIL ULTIMATE PROTECTION



PROXIL URANUS 15W-40 API CI-4/SL

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

DESCRIPTION

15W-40 API CI-4/SL is a high-quality engine oil suitable for both diesel and gasoline engines. Meeting the standards of API CI-4 for diesel engines and API SL for gasoline engines, this oil provides exceptional protection against wear, oxidation, and deposits.

MEETS OR EXCEEDS:

API CI-4, CH-4, SL, SJ, ACEA E7-16, MB 228.3, MAN 3275, VOLVO VDS-3, DEUTZ DQC-III, DEUTZ DQC II, MTU 2.0, MACK EO-N, MACK EO-M+, CUMMINS CES 20078/ 77, CATERPILLAR ECF-1A, ECF-2, RENAULT RLD-2, JASO DH-1, GLOBAL DHD-1, DDC 93K215.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.863
Viscosity @100°C, cSt	ASTM D 445	15.15
Viscosity @40°C, cSt	ASTM D 445	119
Viscosity Index	ASTM D 2270	133
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	11
CCS @-20°C,mPa.s	ASTM D 5293	6450

PROXIL URANUS 20W-50 API CH-4/SJ

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

DESCRIPTION

20W-50 API CH-4/SJ is a robust engine oil primarily designed for heavy-duty diesel engines. It adheres to the stringent specifications set by the American Petroleum Institute (API) for CH-4 classification, indicating its suitability for high-performance diesel engines.

MEETS OR EXCEEDS:

MB 228.1, MAN 3275, CATERPILLAR ECF-1A, ACEA E7-16.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	20.2
Viscosity @40°C, cSt	ASTM D 445	170
Viscosity Index	ASTM D 2270	138
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	10.1
CCS @-15°C,mPa.s	ASTM D 5293	7250

PROXIL URANUS SAE-40 API CF/SF

High Performance Technology engine oil for gasoline engine

DESCRIPTION

SAE-40 API CF/SF is a high-quality engine oil formulated to meet the specifications of both API CF and API SF classifications. It is suitable for use in gasoline and diesel engines, offering excellent protection against wear, oxidation, and deposits.

MEETS OR EXCEEDS:

API CF, CD, SF, MB 228.0, CATERPILLAR TO-2, MTU TYPE-1, ACEA E2.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.872
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity Index	ASTM D 2270	123
Pour Point, °C	ASTM D 97	
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

PROXIL URANUS SAE-50 API CF/SF

Super premium heavy duty diesel engine oil

DESCRIPTION

SAE-50 API CF/SF is a robust engine oil designed to meet the requirements of both API CF and API SF classifications. This high-quality oil is suitable for use in gasoline and diesel engines, providing exceptional protection against wear, oxidation, and deposits.

MEETS OR EXCEEDS:

API CF, CD, SF, MB 228.0, CATERPILLAR TO-2, MTU TYPE-1, ACEA E2

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.872
Viscosity @100°C, cSt	ASTM D 445	20.2
Viscosity @40°C, cSt	ASTM D 445	164
Viscosity Index	ASTM D 2270	132
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8





DIESEL ENGINE OIL ULTIMATE PROTECTION



PROXIL URANUS SAE-60 API CF

Super premium heavy duty diesel engine oil

DESCRIPTION

SAE-60 API CF is a heavy-duty engine oil engineered to meet the specifications of API CF classification. Specifically formulated for diesel engines, it offers superior protection against wear, oxidation, and deposits. With its SAE 60 viscosity grade, this oil provides robust lubrication, particularly in high-temperature environments and under heavy loads.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.879
Viscosity @100°C, cSt	ASTM D 445	24.3
Viscosity @40°C, cSt	ASTM D 445	267
Viscosity Index	ASTM D 2270	115
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

MEETS OR EXCEEDS:

API CF, CD, SF, MB 228.0, CATERPILLAR TO-2. MTU TYPE-1, ACEA E2.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL URANUS SAE-70 API CF

Super premium heavy duty diesel engine oil

DESCRIPTION

SAE-70 API CF is a heavy-duty engine oil designed to meet the requirements of the API CF classification. Tailored for use in diesel engines, this oil offers outstanding protection against wear, oxidation, and deposits.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.879
Viscosity @100°C, cSt	ASTM D 445	29.5
Viscosity @40°C, cSt	ASTM D 445	328.8
Viscosity Index	ASTM D 2270	123
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

MEETS OR EXCEEDS:

API CF, CD, SF, MB 228.0, CATERPILLAR TO-2. MTU TYPE-1, ACEA E2.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL URANUS HD-50 API CF/SF

High Performance Technology engine oil for gasoline engine

DESCRIPTION

HD-50 API CF/SF is a high-performance engine oil engineered to meet the standards of both API CF and API SF classifications. Suitable for gasoline and diesel engines, this oil offers excellent protection against wear, oxidation, and deposits.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.884
Viscosity @100°C, cSt	ASTM D 445	20.2
Viscosity @40°C, cSt	ASTM D 445	234
Viscosity Index	ASTM D 2270	98
Pour Point, °C	ASTM D 97	-18
Flash point °C	ASTM D 92	245
TBN, mgKOH/gm	ASTM D 2896	8

MEETS OR EXCEEDS:


API CF, CD, SF, MB 228.0, CATERPILLAR TO-2. MTU TYPE-1, ACEA E2.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



DIESEL ENGINE OIL

FORMULATED TO DELIVER PEAK PERFORMANCE AND DURABILITY, ENSURING YOUR ENGINE OPERATES AT ITS BEST. ADVANCED ADDITIVES PROVIDE UNMATCHED PROTECTION AGAINST WEAR, DEPOSITS, AND CORROSION, SAFEGUARDING VITAL ENGINE COMPONENTS. OPTIMAL VISCOSITY CONTROL ENSURES SMOOTH OPERATION AND MAXIMIZES FUEL EFFICIENCY, SAVING YOU MONEY IN THE LONG RUN. ENGINEERED TO WITHSTAND THE TOUGHEST CONDITIONS, PROLONGING THE LIFE OF YOUR ENGINE AND REDUCING MAINTENANCE COSTS.

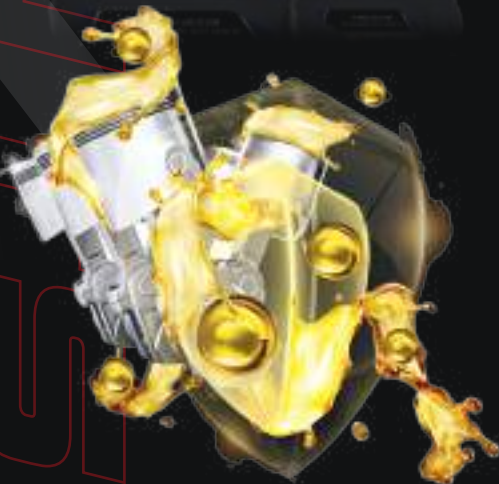

PROXIL®



LUBRICANTS
GEAR OIL



GEAR OIL ULTIMATE PROTECTION



PROXIL NEPTUNE 75W-80 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

75W-80 API GL 5 is a specialized gear oil designed for automotive transmissions and differentials. Meeting the API GL 5 specification, it provides exceptional protection against wear, corrosion, and extreme pressures in various gear systems.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	16.3
Viscosity @40°C, cSt	ASTM D 445	125
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	220

MEETS OR EXCEEDS:

MIL L 2105 C; FORD WSD-M2C200-C; MACK GO-J PLUS; PSA B71 2330

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL NEPTUNE 75W-90 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

75W-90 API GL 5 is a high-performance gear oil formulated for use in automotive transmissions and differentials. Compliant with the API GL 5 specification, it offers superior protection against wear, corrosion, and extreme pressures in gear systems.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.875
Viscosity @100°C, cSt	ASTM D 445	16.3
Viscosity @40°C, cSt	ASTM D 445	125
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215

MEETS OR EXCEEDS:

API GL-5/MT-1 (EQV.MIL-L2105D), SAE J2360, SCANIA STO 1:0, MAN 342 M2, ZF TE ML 05A, 7A, 12E, 16B, C & D, 17B, 19B, 21A, VOLVO 1273.10.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL NEPTUNE 80W-90 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

80W-90 API GL 5 is a heavy-duty gear oil specifically designed for automotive transmissions and differentials. Formulated to meet the API GL 5 specification, it offers superior protection against wear, corrosion, and extreme pressures in gear systems.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.885
Viscosity @100°C, cSt	ASTM D 445	14.6
Viscosity @40°C, cSt	ASTM D 445	152
Viscosity Index	ASTM D 2270	96
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

MEETS OR EXCEEDS:

API GL-5, MIL-L-2105D (U.S MILITARY SPECIFICATIONS), MAN 342 M2, ZF TE ML 05A, 7A, 12E, 16EB, C & D, 17B,19B, 21A.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL NEPTUNE 85W-90 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

85W-90 API GL 5 is a robust gear oil engineered for automotive transmissions and differentials, meeting the API GL 5 specification. Designed to withstand high pressures and temperatures, it offers exceptional protection against wear and corrosion in gear systems.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.885
Viscosity @100°C, cSt	ASTM D 445	14.6
Viscosity @40°C, cSt	ASTM D 445	152
Viscosity Index	ASTM D 2270	96
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	245

MEETS OR EXCEEDS:

API GL-5, MIL-L-2105D (U.S MILITARY SPECIFICATIONS), MAN 342 M2, ZF TE ML 05A, 7A, 12E, 16EB, C & D, 17B,19B, 21A.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



GEAR OIL ULTIMATE PROTECTION



PROXIL NEPTUNE 85W-140 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

85W-140 API GL 5 is a heavy-duty gear oil designed for use in automotive transmissions and differentials, meeting the API GL 5 specification. Engineered to endure extreme pressures and temperatures, it provides exceptional protection against wear and corrosion in gear systems.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.894
Viscosity @100°C, cSt	ASTM D 445	25.3
Viscosity @40°C, cSt	ASTM D 445	375
Viscosity Index	ASTM D 2270	90
Pour Point, °C	ASTM D 97	-15
Flash point °C	ASTM D 92	260

MEETS OR EXCEEDS:

API GL-5, MIL-L-2105D (U.S MILITARY SPECIFICATIONS), MAN 342 M2, ZF TE ML O5A, 7A, 12E, 16EB, C & D, 17B, 19B, 21A SCANIA STO 1:0, VOLVO 1273.10.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL NEPTUNE SAE 90 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

SAE 90 API GL 5 is a heavy-duty gear oil specifically formulated for use in automotive transmissions and differentials. It meets the API GL 5 specification, indicating its capability to provide superior protection against wear, corrosion, and extreme pressures in gear systems.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.885
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	167
Viscosity Index	ASTM D 2270	94
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	245

MEETS OR EXCEEDS:

API GL-5, MIL-L-2105D (U.S MILITARY SPECIFICATIONS), MAN 342 M2, ZF TE ML O5A, 7A, 12E, 16EB, C & D, 17B,19B, 21A.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL NEPTUNE SAE 140 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

SAE 140 API GL 5 is a heavy-duty gear oil specially formulated for use in automotive transmissions and differentials. It adheres to the API GL 5 specification, indicating its ability to provide superior protection against wear, corrosion, and extreme pressures in gear systems

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.894
Viscosity @100°C, cSt	ASTM D 445	25.8
Viscosity @40°C, cSt	ASTM D 445	380
Viscosity Index	ASTM D 2270	90
Pour Point, °C	ASTM D 97	-15
Flash point °C	ASTM D 92	265

MEETS OR EXCEEDS:


API GL-5, MIL-L-2105D (U.S MILITARY SPECIFICATIONS), MAN 342 M2, ZF TE ML O5A, 7A, 12E, 16EB, C & D, 17B,19B, 21A.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



GEAR OIL

GEAR OIL IS DESIGNED FOR PEAK PERFORMANCE IN DEMANDING GEAR SYSTEMS. WITH SUPERIOR PROTECTION AGAINST WEAR AND CORROSION, OPTIMIZED VISCOSITY FOR EFFICIENCY, AND RESILIENCE IN EXTREME CONDITIONS, IT ENSURES SMOOTH OPERATION AND PROLONGED GEAR LIFE. TRUST IN OUR QUALITY FOR RELIABLE PERFORMANCE IN ANY SITUATION. OUR FORMULATION ALSO INCLUDES CAREFULLY SELECTED BASE OILS WITH OPTIMIZED VISCOSITY CHARACTERISTICS, ENSURING SMOOTH GEAR OPERATION AND EFFICIENT POWER TRANSMISSION.

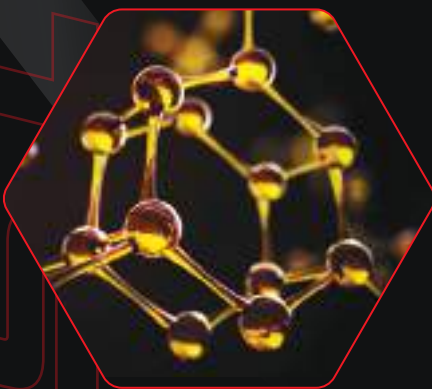

PROXIL®



HYDRAULIC FLUIDS

PROXIL PLUTO AW-10

Heavy duty protection antiwear hydraulic fluid

DESCRIPTION

AW 10 is a low-viscosity hydraulic oil suitable for use in hydraulic systems where precise control and responsiveness are required. It belongs to the ISO VG (Viscosity Grade) classification system, indicating its viscosity at 40°C

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.858
Viscosity @100°C, cSt	ASTM D 445	2.75
Viscosity @40°C, cSt	ASTM D 445	10.4
Viscosity Index	ASTM D 2270	105
Pour Point, °C	ASTM D 97	-15
Flash point °C	ASTM D 92	190

MEETS OR EXCEEDS:

DENISON HF-0, HF-1, HF-2, DIN 51524 PART II, ISO 11158 HM, SAE MS 1004 HM AND ASTM D6158 HM, CINCINNATI MACHINE P-68, P-69 AND P-70

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL PLUTO AW-32

Heavy duty protection antiwear hydraulic fluid

DESCRIPTION

AW 32 hydraulic oil offers a balanced viscosity that provides sufficient lubrication while ensuring smooth operation and efficient energy transfer within hydraulic systems. It is suitable for a wide range of hydraulic applications, including industrial machinery, mobile equipment, and hydraulic power units.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.868
Viscosity @100°C, cSt	ASTM D 445	5.15
Viscosity @40°C, cSt	ASTM D 445	32.8
Viscosity Index	ASTM D 2270	92
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

MEETS OR EXCEEDS:

DENISON HF-0, HF-1, HF-2, DIN 51524 PART II, ISO 11158 HM, SAE MS 1004 HM AND ASTM D6158 HM, CINCINNATI MACHINE P-68, P-69 AND P-70

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL PLUTO AW-37

Heavy duty protection antiwear hydraulic fluid

DESCRIPTION

AW 37 is indeed a specific type of hydraulic fluid designed for heavy-duty applications, particularly emphasizing anti-wear protection. This fluid is formulated to meet the requirements of hydraulic systems operating under high pressures and loads, where wear and tear are significant concerns.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.869
Viscosity @100°C, cSt	ASTM D 445	5.65
Viscosity @40°C, cSt	ASTM D 445	37.5
Viscosity Index	ASTM D 2270	93
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

MEETS OR EXCEEDS:

DENISON HF-0, HF-1, HF-2, DIN 51524 PART II, ISO 11158 HM, SAE MS 1004 HM AND ASTM D6158 HM, CINCINNATI MACHINE P-68, P-69 AND P-70

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL PLUTO AW-46

Heavy duty protection antiwear hydraulic fluid

DESCRIPTION

AW 46 heavy-duty protection anti-wear hydraulic fluid offers superior lubrication and protection for hydraulic systems operating under demanding conditions. Formulated with advanced anti-wear additives, it minimizes friction, reduces wear on critical components, and ensures smooth operation.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.868
Viscosity @100°C, cSt	ASTM D 445	6.7
Viscosity @40°C, cSt	ASTM D 445	46.8
Viscosity Index	ASTM D 2270	94
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

MEETS OR EXCEEDS:

DENISON HF-0, HF-1, HF-2, DIN 51524 PART II, ISO 11158 HM, SAE MS 1004 HM AND ASTM D6158 HM, CINCINNATI MACHINE P-68, P-69 AND P-70

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX





HYDRAULIC FLUID ULTIMATE PROTECTION



PROXIL PLUTO AW-68

Heavy duty protection antiwear hydraulic fluid



DESCRIPTION

AW 68 heavy-duty protection anti-wear hydraulic fluid is engineered to provide exceptional lubrication and protection for hydraulic systems subjected to rigorous conditions. With advanced anti-wear additives, it forms a protective layer on metal surfaces, reducing friction and minimizing wear on critical components.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.873
Viscosity @100°C, cSt	ASTM D 445	8.49
Viscosity @40°C, cSt	ASTM D 445	66.5
Viscosity Index	ASTM D 2270	97
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	230

MEETS OR EXCEEDS:

DENISON HF-0, HF-1, HF-2, DIN 51524 PART II, ISO 11158 HM, SAE MS 1004 HM AND ASTM D6158 HM, CINCINNATI MACHINE P-68, P-69 AND P-70

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

HYDRAULIC FLUID



HYDRAULIC FLUID IS A SPECIALLY FORMULATED OIL USED IN HYDRAULIC MACHINERY TO TRANSMIT POWER. IT'S A CRUCIAL COMPONENT IN HYDRAULIC SYSTEMS, WHICH ARE WIDELY USED IN VARIOUS INDUSTRIES SUCH AS CONSTRUCTION, AUTOMOTIVE, AEROSPACE, AND MANUFACTURING.

HYDRAULIC FLUIDS COME IN VARIOUS FORMULATIONS, INCLUDING MINERAL OIL-BASED, SYNTHETIC, AND WATER-BASED FLUIDS. THE CHOICE OF HYDRAULIC FLUID DEPENDS ON FACTORS SUCH AS OPERATING TEMPERATURE, SYSTEM PRESSURE, ENVIRONMENTAL REGULATIONS, AND SPECIFIC APPLICATION REQUIREMENTS. REGULAR MAINTENANCE, INCLUDING FLUID CHECKS AND REPLACEMENTS, IS ESSENTIAL TO ENSURE THE PROPER FUNCTIONING AND LONGEVITY OF HYDRAULIC SYSTEMS.

PROXIL®



AUTO TRANSMISSION FLUID



AUTO TRANSMISSION FLUID ULTIMATE PROTECTION



PROXIL MERCURY ATF CVTF

Energize performance automatic transmission fluid

DESCRIPTION

ATF CVTF is engineered to meet the unique requirements of CVTs, providing smooth operation, optimal friction control, and reliable performance over a wide range of operating conditions.

MEETS OR EXCEEDS:

AUDI/VW (TL 52180; G 052 180, G 052 516), DAIHATSU (AMIX CVTF-DC/AMIX CVTF DFE), FORD (CVT23/CVT30/MERCON C/CVT30/WSS-M2C933-A/MOTORCRAFT XT-7-QCFT), HONDA (HMMF, HCF-2), JASO 1A, MAZDA CVTF 3320, SUBARU (NS-2/LINEARTRONIC CVTF/J-CVTF/KO425Y0710/CV-30/E-CVTF), SHELL GREEN IV, BMW/MINI COOPER 8322 O 136 376/8322 O 429 154 (EZL 799), DODGE/EEP CVT (NS-2/CVTF+4/MOPAR CVT 4), HYUNDAI GENUINE CVTF, MERCEDES BENZ CVT28 (236.20), NISSAN NS-1/NS-2/NS-3, TOYOTA/LEXUS TC/FE, GM/SATURN (DEX-CVT/CVTF F-GREEN2[®]), HYUNDAI/KIA (SP-II, SP CVT 1), MITSUBISHI (CVTF-J1/CVTF-DIAQUEEN J1/DIAQUEEN J-4/SP-), PUNCH (EZL 799A), SUZUKI (TC/NS-2/CVT GREEN 1/CVTF GREEN 2/CVTF 3320), ZF CVT VI.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	7.15
Viscosity @40°C, cSt	ASTM D 445	34.7
Viscosity Index	ASTM D 2270	175
Pour Point, °C	ASTM D 97	-48
Flash point °C	ASTM D 92	215



PROXIL MERCURY ATF DEX VI

Energize performance automatic transmission fluid

DESCRIPTION

ATF DEX VI is an advanced automatic transmission fluid formulated to meet the specifications of General Motors' DEXRON VI specification. This fluid is designed to provide superior performance and compatibility with modern automatic transmissions, including those equipped with electronically controlled systems.

MEETS OR EXCEEDS:

GENERAL MOTORS DEXRON-VI, TOYOTA T-WS (JWS 3324), ZF M-1375.4 (6HP), VICKERS M2950-S, I-286-S, ALLISON C-3 & C-4, MITSUBISHI DIAQUEEN SP-IV, ACURA ATF-Z1, JASO 1A-LV, HYUNDAI/ KIA SP-IV, HONDA ATF DW-1/ ACURA ATF-Z1 VOLVO CE 97340, PORSCHE T-IV (JWS 3309), CHRYSLER ATF+, +2, +3 (MS 7176E), +4 (MS 9602) AUDI 5 HP LT71141, FORD MERCON LV, NISSAN MATIC S/ CAT TO-2, MB 236.12 & 236.14, HYUNDAI NWS-9638, MB 236.1/236.9, BMW MINI/LA2634, CAT TO-2.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	6
Viscosity @40°C, cSt	ASTM D 445	30.5
Viscosity Index	ASTM D 2270	150
Pour Point, °C	ASTM D 97	-51
Flash point °C	ASTM D 92	215



PROXIL MERCURY ATF DEX III

Energize performance automatic transmission fluid

DESCRIPTION

ATF DEX III is a type of automatic transmission fluid designed to meet the specifications set by General Motors for DEXRON III fluid. This fluid is engineered to provide exceptional lubrication, friction control, and temperature stability in automatic transmissions.

MEETS OR EXCEEDS:

GM DEXRON III & FORD MERCON, MB 236.1/5/6/7, TOYOTA T-III T-IV, ALLISON C-4 & CAT TO-2, MAN 339 Z1 & V1/339 Z2 & V2, VOITH TURBO 55.6335, ZF TE-ML O3D/O4D/O9/11A/11B/14A/17C.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.850
Viscosity @100°C, cSt	ASTM D 445	7.7
Viscosity @40°C, cSt	ASTM D 445	39
Viscosity Index	ASTM D 2270	171
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	210



PROXIL MERCURY ATF DEX II

Energize performance automatic transmission fluid

DESCRIPTION

ATF DEX II is a specific type of automatic transmission fluid formulated to meet the requirements of General Motors' DEXRON II specification. This fluid is designed for use in automatic transmissions, power steering systems, and hydraulic systems in vehicles that require DEXRON II fluid.

MEETS OR EXCEEDS:

GM DEXRON II & FORD MERCON, MB 236.1/5/6/7, ZF TE-ML O3D/ O4D/O9/11A/11B/14A/17C, MAN 339 Z1 & V1/339 Z2 & V2, VOITH TURBO 55.6335 (G607 LIST), ALLISON C-4 & CAT TO-2.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	7.2
Viscosity @40°C, cSt	ASTM D 445	35.5
Viscosity Index	ASTM D 2270	160
Pour Point, °C	ASTM D 97	-45
Flash point °C	ASTM D 92	215





ATF, COOLANT ULTIMATE PROTECTION



PROXIL MERCURY ATF TYPE A

Energize performance automatic transmission fluid

DESCRIPTION

ATF Type A Energize is a high-performance automatic transmission fluid (ATF) designed to optimize transmission performance and reliability. Engineered with advanced additives, it enhances lubrication, reduces friction, and ensures smooth shifting in automatic transmissions.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	6.8
Viscosity @40°C, cSt	ASTM D 445	36
Viscosity Index	ASTM D 2270	148
Pour Point, °C	ASTM D 97	-30
Flash point °C	ASTM D 92	215

MEETS OR EXCEEDS:

GM DEXRON , TYPE A, MB 236.2.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL BRAKE FLUID DOT-3

Heavy duty high-quality synthetic

DESCRIPTION

Proxil DOT 3 Brake Fluid is a high-quality hydraulic fluid designed specifically for use in automotive braking systems. It meets or exceeds DOT 3 specifications, ensuring reliable performance and safety for your vehicle's braking system.

Proxil DOT 3 Brake Fluid is compatible with all materials commonly used in brake systems and offers excellent resistance to corrosion and oxidation, prolonging the life of brake components. Its high boiling point helps maintain braking efficiency even under extreme conditions, making it suitable for both everyday driving and high-performance applications.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL BRAKE FLUID DOT-4

Heavy duty high-quality synthetic

DESCRIPTION

Proxil DOT 4 Brake Fluid is a premium-grade hydraulic fluid formulated to meet the rigorous demands of modern braking systems. It surpasses DOT 4 specifications, ensuring superior performance and safety for your vehicle's braking system.

Proxil DOT 4 Brake Fluid is engineered to provide exceptional thermal stability and resistance to moisture absorption, preventing vapor lock and maintaining consistent braking performance even under extreme temperatures and heavy braking conditions.

Its high boiling point enhances safety and reliability, while compatibility with various brake system materials ensures optimal performance and longevity.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL RADIATOR COOLANT

Ultra long life radiator coolant 240,000km protection

DESCRIPTION

Radiator coolant is typically a mixture of water and ethylene glycol or propylene glycol, along with various additives. It's important to use the correct type of coolant recommended by the vehicle manufacturer to ensure compatibility and proper performance. Additionally, regular coolant flushes and replacements are necessary to maintain the cooling system's effectiveness and prevent corrosion and component damage.

Heat Transfer: Coolant absorbs heat from the engine and transports it to the radiator, where it dissipates into the surrounding air.

Freeze Protection: Coolant contains additives that lower its freezing point, preventing the coolant from solidifying in cold temperatures and potentially damaging the engine.

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PROXIL®



LUBRICANTS



MOTORCYCLE OIL ULTIMATE PROTECTION



PROXIL MARS 4T STROKE OIL 10W-40 SN

Off road superior performance motorcycle engine oil

DESCRIPTION

4T STROKE OIL 10W-40 SN is a four-stroke engine oil with a viscosity grade of 10W-40, suitable for engines with a separate oil reservoir. It meets the SN specifications, providing modern performance and protection for gasoline engines.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	14.3
Viscosity @40°C, cSt	ASTM D 445	130
Viscosity Index	ASTM D 2270	158
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	8
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API SN,SM,SL , JASO MA,JASO MA2, JASO 4T CLUTCH PERFORMANCE

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL MARS 4T STROKE OIL 10W-40 SL

High Performance Technology engine oil for gasoline engine

DESCRIPTION

4T STROKE OIL 10W-40 SL is a four-stroke engine oil with a viscosity grade of 10W-40, suitable for engines with separate oil reservoirs. It meets the SL specifications, providing modern performance and protection for gasoline engines.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.873
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	101
Viscosity Index	ASTM D 2270	156
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	225
TBN, mgKOH/gm	ASTM D 2896	7.8
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API SL , JASO MA,JASO MA2, JASO 4T CLUTCH PERFORMANCE

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL MARS 4T STROKE OIL 20W-50 SL

Off road superior performance motorcycle engine oil

DESCRIPTION

4T STROKE OIL 20W-50 SL is a four-stroke engine oil with a viscosity grade of 20W-50, suitable for engines with separate oil reservoirs. It meets the SL specifications, providing modern performance and protection for gasoline engines, particularly in older or high-mileage vehicles.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	20.4
Viscosity @40°C, cSt	ASTM D 445	175
Viscosity Index	ASTM D 2270	136
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	7.2
CCS @-15°C,mPa.s	ASTM D 5293	7500

MEETS OR EXCEEDS:

API SL , JASO MA,JASO MA2, JASO 4T CLUTCH PERFORMANCE

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PROXIL MARS 2T STROKE OIL TC/JASO FD

Off road superior performance motorcycle engine oil

DESCRIPTION

2T STROKE OIL TC/JASO FD is a high-quality two-stroke engine oil suitable for engines requiring a premixed oil and fuel mixture. It meets the TC specifications for two-stroke engines and complies with the JASO FD standard for superior performance and cleanliness.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.866
Viscosity @100°C, cSt	ASTM D 445	7.8
Viscosity @40°C, cSt	ASTM D 445	47.5
Viscosity Index	ASTM D 2270	135
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	96
Sulphated Ash, %wt	ASTM D 874	0.09

MEETS OR EXCEEDS:

API TC,JASO FB,FC,FD

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX





MOTORCYCLE OIL ULTIMATE PROTECTION



PROXIL MARS 2T STROKE OIL TC/JASO FB

Off road superior performance motorcycle engine oil

DESCRIPTION

2T STROKE OIL TC/JASO FB is a two-stroke engine oil suitable for engines requiring a premixed oil and fuel mixture. It meets the TC specifications for two-stroke engines and complies with the JASO FB standard for good lubrication properties.

SPECIFICATION

Density @29.5°C, gm/CC	ASTM D 4052	0.872
Viscosity @100°C, cSt	ASTM D 445	7.95
Viscosity @40°C, cSt	ASTM D 445	48.5
Viscosity Index	ASTM D 2270	135
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	105
Foam Characteristics	ASTM 892	

MEETS OR EXCEEDS:

API TC, JASO FB, FC, FD

SIZE : 250ML, 500ML, 1L, 3L, 4L, 5L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



MOTORCYCLE OIL



EXPERIENCE SUPERIOR PERFORMANCE ON AND OFF THE ROAD WITH OUR SPECIALIZED OFF-ROAD MOTORCYCLE ENGINE OIL. ENGINEERED TO EXCEL IN THE TOUGHEST CONDITIONS, OUR OIL OFFERS UNMATCHED PROTECTION AND RELIABILITY FOR YOUR OFF-ROAD ADVENTURES.

WITH ADVANCED ADDITIVES AND VISCOSITY CONTROL, IT ENSURES OPTIMAL LUBRICATION, ENGINE CLEANLINESS, AND COMPONENT LONGEVITY, EVEN UNDER EXTREME STRESS AND HIGH TEMPERATURES.

FROM RUGGED TRAILS TO DESERT SANDS, TRUST OUR OFF-ROAD MOTORCYCLE ENGINE OIL TO KEEP YOUR BIKE RUNNING SMOOTHLY AND RELIABLY, SO YOU CAN FOCUS ON CONQUERING THE TERRAIN AHEAD.

PROXIL MARS



ULTIMATE PROTECTION

ENGINE OIL



LUBRICANTS
HIGH PERFORMANCE



ULTIMATE PROTECTION



208 LITERS

AVAILABLE



ULTIMATE PROTECTION



250ML, 500ML, 1L, 3L, 4L, 5L - (CAN) 20L, 25L - (PAIL) 60L, 208L - (DRUM) 1000L, 25,000L - (IBC)

ORDER NOW!

FOR INQUIRIES!

CALL OR WHATSAPP US

+971 56 696 7810

info@proxil.ae | sales@proxil.ae



LUBRICANTS

20FT CONTAINER

20FT CONTAINER LOAD UP TO 26 TON

PRODUCTS SIZE	UNITS	WEIGHT	QUANTITY	TOTAL WEIGHT
250ML CTN	24	9.8 KG	2200 CTN	21,560 KG
500ML CTN	24	13.5 KG	1500 CTN	20,250 KG
1L CTN	12	11.4 KG	1400 CTN	15,960 KG
1L CTN	24	22.8 KG	700 CTN	15,960 KG
3L CTN	6	17.35 KG	980 CTN	17,000 KG
4L CTN	4	14.9 KG	1050 CTN	15,645 KG
4L CTN	6	22.3 KG	700 CTN	15,610 KG
5L CTN	4	18.4 KG	850 CTN	15,640 KG
5L CTN	6	27.7 KG	550 CTN	15,235 KG
20L PAIL	1	18.3 KG	1080 PAIL	19,764 KG
25L PAIL	1	22.6 KG	900 PAIL	20,340 KG
60L DRUM	1	57 KG	324 DRUM	18,468 KG
208L DRUM	1	190 KG	100 DRUM	19,000 KG

LUBRICANTS

40FT CONTAINER

40FT CONTAINER LOAD UP TO 28 TON

PRODUCTS SIZE	UNITS	WEIGHT	QUANTITY	TOTAL WEIGHT
250ML CTN	24	9.8 KG	2850 CTN	27,900 KG
500ML CTN	24	13.5 KG	2070 CTN	27,950 KG
1L CTN	12	11.4 KG	2400 CTN	27,360 KG
1L CTN	24	22.8 KG	1200 CTN	27,360 KG
3L CTN	6	17.35 KG	1610 CTN	27,934 KG
4L CTN	4	14.9 KG	1880 CTN	28,000 KG
4L CTN	6	22.3 KG	1255 CTN	27,990 KG
5L CTN	4	18.4 KG	1520 CTN	27,970 KG
5L CTN	6	27.7 KG	1000 CTN	27,700 KG
20L PAIL	1	18.3 KG	1530 PAIL	28,000 KG
25L PAIL	1	22.6 KG	1240 PAIL	28,000 KG
60L DRUM	1	57 KG	490 DRUM	27,930 KG
208L DRUM	1	190 KG	145 DRUM	27,550 KG



CONTACT

+971 56 696 7810



EMAIL

INFO@PROXIL.AE
SALES@PROXIL.AE



WEBSITE

WWW.PROXIL.AE

ULTIMATE PROTECTION



PROXIL LUBRICANTS



HEAD OFFICE ADDRESS

NO. 403, AL HABTOOR NAIF BUILDING, DEIRA,
DUBAI, UNITED ARAB EMIRATES



SHOWROOM ADDRESS

SHOP 6, 21C ST, NAIF, DEIRA,
DUBAI, UNITED ARAB EMIRATES



تایید شده توسط کشورهای صنعتی درجه یک جهان
قابل استفاده برای تمامی خودروهای جهان

www.jebalshimi.com





مایع سیستم ترمز خودرو

مشخصات کلی :

مطابق با استاندارد ملی ایران ۳۶۳

مطابق با استاندارد DOT3 FMVSS116

نقطه جوش ۲۴۰ درجه سانتیگراد

نقطه جوش مرطوب ۱۵۰ درجه سانتیگراد



مایع سیستم ترمز خودرو

مشخصات کلی :

مطابق با استاندارد ملی ایران ۳۶۳

مطابق با استاندارد DOT3 FMVSS116

نقطه جوش ۲۴۰ درجه سانتیگراد

نقطه جوش مرطوب ۱۵۰ درجه سانتیگراد

تایید شده توسط کشورهای صنعتی درجه یک جهان
قابل استفاده برای تمامی خودروهای جهان
www.jebalshimi.com



شماره تلفن: ۳ - ۲۱۸۸۴۸۶۴۲۱

مدیر فروش: ۹۱۲۱۲۵۸۸۴۷

فکس: ۲۱۸۶۰۱۵۵۴۸

آدرس کارخانه: شهرک صنعتی نظر اباد

آدرس دفتر مرکزی: مرزداران